


## GB200

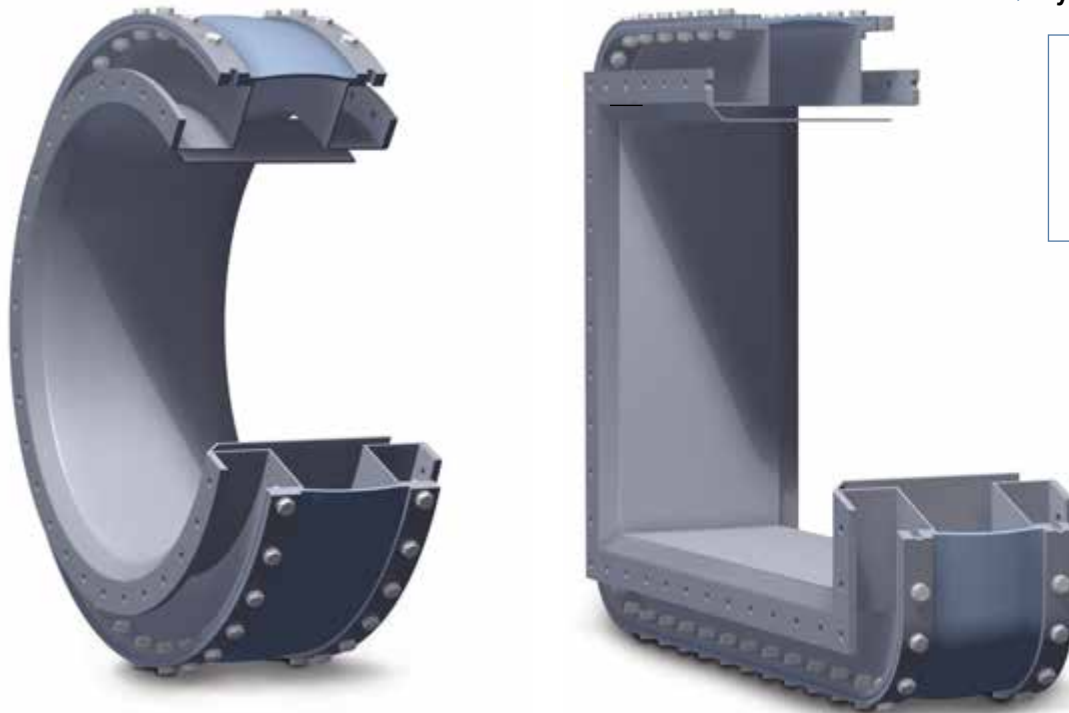

### ► Type GB200

Type key	► page 20
GB2	Support ring variants
00	Number of arches
	Type

## Belt expansion joint on duct angles without arch

<b>Design:</b>	Straight or conical elastomer or multilayer expansion joint with sleeves for clamp bar fixing Optional expansion joint with installation seam
<b>Installation method:</b>	Clamp bar fixing on duct angles
<b>Dimensions:</b>	For round and rectangular duct cross sections
<b>Installation length:</b>	= Installation gap + 2x fixing width Individually according to customer specifications
<b>Fixing width:</b>	Depends on pressure and nominal diameter between 60 and 100 mm
<b>Media temperature:</b>	Depending on the material and the height of the duct elbow, suitable for up to 500°C
<b>Pressure:</b>	Up to ±0.25 bar Higher pressures on request
<b>Movement:</b>	For axial, lateral and angular movements Benchmarks: axial compression = approx. 0.20 x installation length axial extension = approx. 0.20 x installation gap lateral displacement = approx. 0.15 x installation gap In the event of axial extension and simultaneous lateral displacement, movements are reduced For large lateral movements, we recommend presetting the duct against the direction of movement

### Application:

Power plants, waste incineration plants, gas turbines, cement factories, paper industry, steel industry e.g. in exhaust pipes, in ventilators, in air ducts, in ash lines, in filter systems



## Expansion joint variants

	Elastomer expansion joint	Multilayer expansion joint
<b>Temperature:</b>	up to 200 °C	up to 500 °C
<b>Design:</b>	Single-layer elastomer expansion joint fully joined with one or more fabric reinforcement inserts	Multilayer fabric expansion joint consisting of interior insulating layers, embedded sealing films and exterior pressure carrier fabrics.
<b>Material:</b>	<p><b>Rubber grades:</b>                      up to 100 °C: EPDM, IIR, CSM, NBR                      up to 180 °C: FPM                      up to 200 °C: Silicon (Q)</p> <p><b>PTFE lining:</b>                      Permanently embedded on the inside at the rubber bellows in order to withstand corrosive chemical attack, available starting at NB 300</p> <p><b>Inserts:</b>                      Nylon, polyester, Kevlar, glass fibre, and steel mesh</p>	<p><b>Internal layers:</b>                      PTFE glass fibre fabric laminate, glass fibre fabric, glass mat, silicate fabric</p> <p><b>Sealing films:</b>                      PTFE film, stainless steel film</p> <p><b>External layer:</b>                      Silicon coated glass fibre fabric                      PTFE-glass fibre fabric laminate</p>

## Clamp bar

<b>Design:</b>	Multi-part clamp bar with slotted holes
<b>Materials:</b>	Carbon steel: 1.0038 (S235JRG2) Stainless steel: 1.4301 (X5CrNi18-10) 1.4571 (X6CrNiMoTi17-12-2) Other materials on request
<b>Coating:</b>	Primed, hot-dip galvanised, special paint

## Optional accessories

<b>Fixing:</b>	Screws, nuts, washers, disc springs
<b>Installation unit:</b>	Installation-ready installation unit complete with pre-mounted expansion joint, flow liner and connecting ends for welding or screwing into the duct (▶ page 299)
<b>Installation set:</b>	Tools and aids for punching and closing the expansion joint seam

